

WALA



481

WALA



482



WALA



WALA

Interior



85.5x85.5x90mm 2x3W

P489



85.5x85.5x200mm 2x8W

P490



85.5x85.5x420mm 2x8W

P491



85.5x85.5x420mm 2x8W+SMD5W

P492



85.5x85.5x720mm 2x8W

P493



85.5x85.5x720mm 2x8W+SMD10W

P494

WALA

Interior

	80x90x49mm	5W	P495
	80x126x49mm	2x3W	P495
	80x50x61mm	5W	P496
	Ø 80x174mm	2x5W	P496
	65x65x72mm	5W / 2x3W	P497
	100x100x100mm	2x5W	P498
	80x80mm	3W	P499


WALA

Exterior



	Ø 80x80mm	5W	P501
	Ø 80x174mm	2x5W	P502
	100x100x100mm	2x5W	P503
	Ø 100mm	5W	P504
	100x100mm	5W	P505
	100x150mm	5W	P505
	150x100mm	5W	P506



COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black Aluminum Brush
 Color temperature: 2700K 3000K 4000K




- Screwless design with magnetic mounted to make fixture looks more simple and elegant.
- Comfortable and symmetric light performance.
- Light housing: Pure aluminum.
- Surface mounted and no need wall-mounted plate.
- Light source: COB LED with a reflector of high optical.





W6186 2x3W 380lm
 With LED Driver 9V-500mA
 230V-50Hz

NW
 0.55kg

COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black Aluminum Brush
 Color temperature: 2700K 3000K 4000K



- Screwless design with magnetic mounted to make fixture looks more simple and elegant.
- Comfortable and symmetric light performance.
- Light housing: Pure aluminum.
- Surface mounted and no need wall-mounted plate.
- Light source: COB LED with a reflector of high optical.




W6187 2x3W 380lm
 With LED Driver 9V-500mA
 230V-50Hz



NW
 0.56kg



COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black Aluminum Brush
 Color temperature: 2700K 3000K 4000K




- Screwless design with magnetic mounted to make fixture looks more simple and elegant.
- Comfortable and symmetric light performance.
- Light housing: Pure aluminum.
- Surface mounted and no need wall-mounted plate.
- Light source: COB LED with a reflector of high optical.





W7500 2x8W 580lm
 With LED Driver 36V-180mA
 230V-50Hz

NW
 1.11kg

COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black Aluminum Brush
 Color temperature: 2700K 3000K 4000K



- Screwless design with magnetic mounted to make fixture looks more simple and elegant.
- Comfortable and symmetric light performance.
- Light housing: Pure aluminum.
- Surface mounted and no need wall-mounted plate.
- Light source: COB LED with a reflector of high optical.




W7600 2x8W 580lm
 With LED Driver 36V-180mA
 230V-50Hz



NW
 1.15kg



COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black Aluminum Brush
 Color temperature: 2700K 3000K 4000K




- Screwless design with magnetic mounted to make fixture looks more simple and elegant.
- Comfortable and symmetric light performance.
- Light housing: Pure aluminum.
- Surface mounted and no need wall-mounted plate.
- Light source: COB LED with a reflector of high optical.





W7501 2x8W 580lm
 With LED Driver 36V-180mA
 230V-50Hz

NW
 1.58kg

COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black Aluminum Brush
 Color temperature: 2700K 3000K 4000K



- Screwless design with magnetic mounted to make fixture looks more simple and elegant.
- Comfortable and symmetric light performance.
- Light housing: Pure aluminum.
- Surface mounted and no need wall-mounted plate.
- Light source: COB LED with a reflector of high optical.




W7601 2x8W 580lm
 With LED Driver 36V-180mA
 230V-50Hz



NW
 1.47kg



COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black Aluminum Brush
 Color temperature: 2700K 3000K 4000K




- Screwless design with magnetic mounted to make fixture looks more simple and elegant.
- Comfortable and symmetric light performance.
- Light housing: Pure aluminum.
- Surface mounted and no need wall-mounted plate.
- Light source: COB LED with a reflector of high optical and SMD LED with acrylic diffuser.





W7503 COB2x8W+SMD5W 830lm
 With LED Driver 36V-180mA+36V-135mA
 230V-50Hz

NW
 1.85kg

COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black Aluminum Brush
 Color temperature: 2700K 3000K 4000K



- Screwless design with magnetic mounted to make fixture looks more simple and elegant.
- Comfortable and symmetric light performance.
- Light housing: Pure aluminum.
- Surface mounted and no need wall-mounted plate.
- Light source: COB LED with a reflector of high optical and SMD LED with acrylic diffuser.




W7603 COB2x8W+SMD5W 830lm
 With LED Driver 36V-180mA+36V-135mA
 230V-50Hz



NW
 1.77kg



COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black Aluminum Brush
 Color temperature: 2700K 3000K 4000K




- Screwless design with magnetic mounted to make fixture looks more simple and elegant.
- Comfortable and symmetric light performance.
- Light housing: Pure aluminum.
- Surface mounted and no need wall-mounted plate.
- Light source: COB LED with a reflector of high optical.





W7502 2x8W 580lm
 With LED Driver 36V-180mA
 230V-50Hz



COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black Aluminum Brush
 Color temperature: 2700K 3000K 4000K




- Screwless design with magnetic mounted to make fixture looks more simple and elegant.
- Comfortable and symmetric light performance.
- Light housing: Pure aluminum.
- Surface mounted and no need wall-mounted plate.
- Light source: COB LED with a reflector of high optical.






W7602 2x8W 580lm
 With LED Driver 36V-180mA
 230V-50Hz



COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black Aluminum Brush
 Color temperature: 2700K 3000K 4000K




- Screwless design with magnetic mounted to make fixture looks more simple and elegant.
- Comfortable and symmetric light performance.
- Light housing: Pure aluminum.
- Surface mounted and no need wall-mounted plate.
- Light source: COB LED with a reflector of high optical and SMD LED with acrylic diffuser.






W7504 COB2x8W+SMD10W 960lm
 With LED Driver 36V-180mA+24V-350mA
 230V-50Hz



COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black Aluminum Brush
 Color temperature: 2700K 3000K 4000K



- Screwless design with magnetic mounted to make fixture looks more simple and elegant.
- Comfortable and symmetric light performance.
- Light housing: Pure aluminum.
- Surface mounted and no need wall-mounted plate.
- Light source: COB LED with a reflector of high optical and SMD LED with acrylic diffuser.



W7604 COB2x8W+SMD10W 960lm
 With LED Driver 36V-180mA+24V-350mA
 230V-50Hz






COB LED	CRI≥80	IP20	CE	RoHS
Housing color:	White	Silver	Black	
Color temperature:	2700K	3000K	4000K	




- Light housing: Pure aluminum.
- Wall-mounted plate: Steel sheet.
- Light source: COB LED.
- Included LED driver.

W6102 5W 383lm
With LED Driver 9V-350mA
230V-50Hz

NW
0.31kg




COB LED



GW 5.0kg




COB LED	CRI≥80	IP20	CE	RoHS
Housing color:	White	Silver	Black	
Color temperature:	2700K	3000K	4000K	




- Luminaire housing: Cast aluminum.
- Wall-mounted plate: Stainless sheet.
- Light source: COB LED.
- Included LED driver.

W6014 5W 383lm
With LED Driver 9V-350mA
230V-50Hz

NW
0.26kg




COB LED



GW 13.4kg




COB LED	CRI≥80	IP20	CE	RoHS
Housing color:	White	Silver	Black	Aluminum Brush
Color temperature:	2700K	3000K	4000K	




- Light housing: Pure aluminum.
- Wall-mounted plate: Steel sheet.
- Light source: COB LED.
- Included LED driver.

W6036 2x3W 468lm
With LED Driver 9V-500mA
230V-50Hz

NW
0.37kg




COB LED



GW 3.5kg


COB LED	CRI≥80	IP20	CE	RoHS
Housing color:	White	Silver	Black	
Color temperature:	2700K	3000K	4000K	




- Luminaire housing: Pure aluminum.
- Wall-mounted plate: Steel sheet.
- Light source: COB LED with a lens of optical.
- Included LED driver.

W6001 2x5W 900lm
With LED Driver 36V-250mA
230V-50Hz

NW
0.74kg



COB LED



GW 3.3kg




W6016 5W 380lm
With LED Driver 9V-350mA
230V-50Hz


NW
0.32kg

COB LED	CRI≥80	IP20	CE	RoHS
Housing color:	White	Brush	Black	
Color temperature:	2700K	3000K	4000K	

- Luminaire housing: Pure aluminum.
- Wall-mounted plate: Stainless sheet.
- Light source: COB LED with a lens of optical.
- Included LED driver.



COB LED



GW 11.5kg




W6019 2x3W 450lm
With LED Driver 9V-500mA
230V-50Hz


NW
0.38kg

COB LED	CRI≥80	IP20	CE	RoHS
Housing color:	White	Brush	Black	
Color temperature:	2700K	3000K	4000K	

- Luminaire housing: Pure aluminum.
- Wall-mounted plate: Stainless sheet.
- Light source: COB LED with a lens of optical.
- Included LED driver.



COB LED



GW 11.8kg





W6171 2x5W 800lm
With LED Driver 36V-250mA
230V-50Hz


NW
1.94kg

COB LED	CRI≥80	IP20	CE	RoHS
Housing color:	White	Silver	Black	
Color temperature:	2700K	3000K	4000K	

- Luminaire housing: Pure aluminum.
- Wall-mounted plate: Steel sheet.
- Light source: COB LED with a lens of optical.
- Included LED driver.



COB LED



GW 10.8kg



SMD LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black
 Color temperature: 2700K 3000K 4000K





- Housing: Aluminum sheet.
- Light source: SMD LED.
- Included LED driver.

R6008 1W 35lm
 With LED Driver 3V-350mA
 230V-50Hz

NW
 0.09kg


R6008 3W 68lm
 With LED Driver 3V-700mA
 230V-50Hz

NW
 0.09kg






5058
 Accessories
 For model: R6008 R6803

NW
 0.13kg

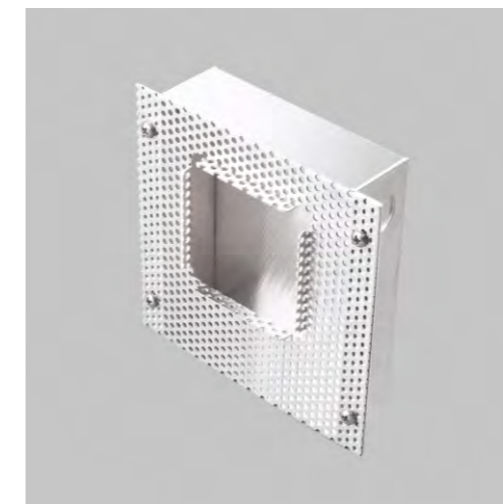

CE RoHS

- Recessed kit in brickwork: Aluminum sheet.

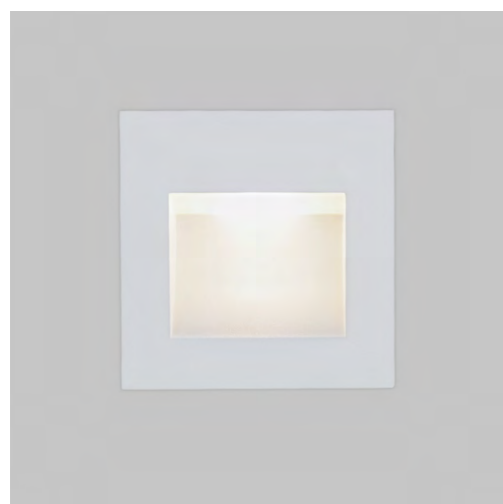

COB LED CRI≥80 IP20 CE RoHS
 Housing color: White Silver Black
 Color temperature: 2700K 3000K 4000K





- Housing: Cast Aluminum.
- Light source: COB LED.
- Included LED driver.

R6803 1W 49lm
 With LED Driver 3V-350mA
 230V-50Hz

NW
 0.28kg

R6803 3W 190lm
 With LED Driver 9V-350mA
 230V-50Hz

NW
 0.28kg




WALA Exterior




COB LED CRI≥80 IP54 CE RoHS
 Housing color: White Silver Black
 Color temperature: 2700K 3000K 4000K



- Luminaire housing: Cast aluminum.
- Wall-mounted plate: Stainless sheet.
- Light source: COB LED with an optical lens and glass.
- Included LED driver.






COB LED



E6018 5W 500lm
 With LED Driver 9V-500mA
 230V-50Hz


NW
 0.58kg

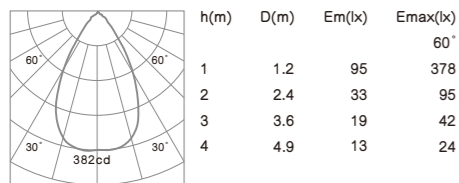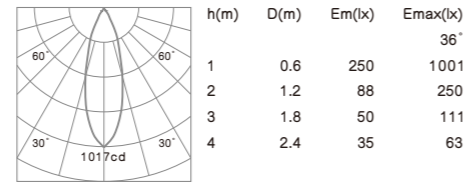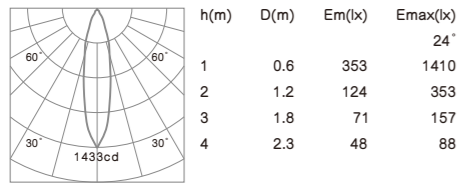


WALA Exterior




COB LED CRI≥80 IP54 CE RoHS
 Housing color: White Silver Black
 Color temperature: 2700K 3000K 4000K



- Luminaire housing: Pure aluminum.
- Wall-mounted plate: Stainless sheet.
- Light source: COB LED with an optical lens and glass.
- Included LED driver.






COB LED



E6029 2x5W 900lm
 With LED Driver 36V-250mA
 230V-50Hz


NW
 0.74kg

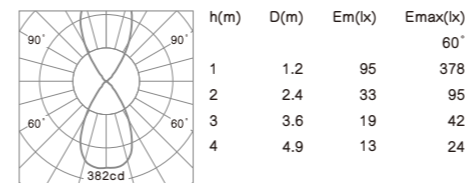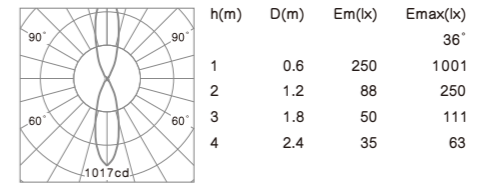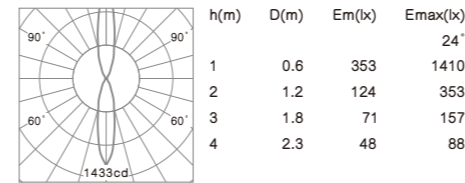


WALA Exterior




COB LED CRI≥80 IP54 CE RoHS
 Housing color: White Silver Black
 Color temperature: 2700K 3000K 4000K



- Luminaire housing: Pure aluminum.
- Wall-mounted plate: Cast aluminum.
- Light source: COB LED with an optical lens and glass.
- Included LED driver.






COB LED



E6016 2x5W 800lm
 With LED Driver 36V-250mA
 230V-50Hz


NW
 1.94kg

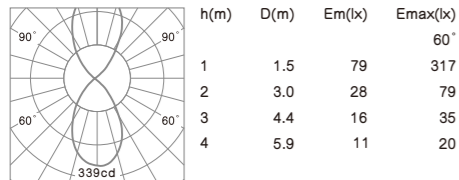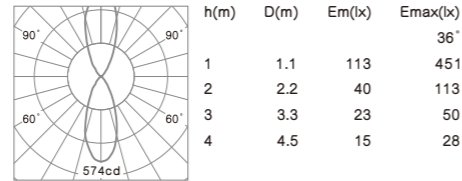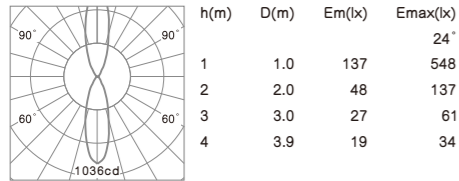

WALA Exterior




COB LED CRI≥80 IP54 CE RoHS
 Housing color: White Silver Black
 Color temperature: 2700K 3000K 4000K




- Housing for recessed mounting in brickwork cast aluminum with a plastic recessed box.
- Light source: COB LED with an optical lens and glass.
- Included LED driver.

E6170 5W 400lm
 With LED Driver 9V-500mA
 230V-50Hz

NW
 0.40kg



COB LED






COB LED CRI≥80 IP54 CE RoHS
 Housing color: White Silver Black
 Color temperature: 2700K 3000K 4000K




- Housing for recessed mounting in brickwork cast aluminum with a plastic recessed box.
- Light source: COB LED with an optical lens and glass.
- Included LED driver.

E6007 5W 100lm
 With LED Driver 9V-500mA
 230V-50Hz

NW
 0.52kg

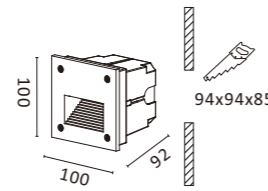

COB LED




COB LED CRI≥80 IP54 CE RoHS
 Housing color: White Silver Black
 Color temperature: 2700K 3000K 4000K




- Housing for recessed mounting in brickwork cast aluminum with a plastic recessed box.
- Light source: COB LED with an optical lens and glass.
- Included LED driver.

E6013 5W 100lm
 With LED Driver 9V-500mA
 230V-50Hz

NW
 0.60kg

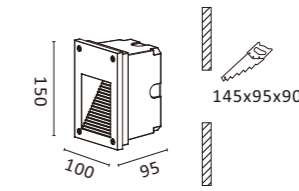

COB LED




COB LED CRI≥80 IP54 CE RoHS
 Housing color: White Silver Black
 Color temperature: 2700K 3000K 4000K




- Housing for recessed mounting in brickwork cast aluminum with a plastic recessed box.
- Light source: COB LED with an optical lens and glass.
- Included LED driver.

E6031 2x5W 170lm
 With LED Driver 36V-250mA
 230V-50Hz

NW
 0.67kg

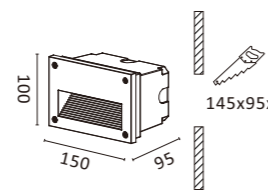

COB LED



OFFICE



507

OFFICE



SMD LED
Lens of optical

Anti-glare


Office Lighting

Recessed
Pendant

508

OFFICE

Oval wide flood
120°

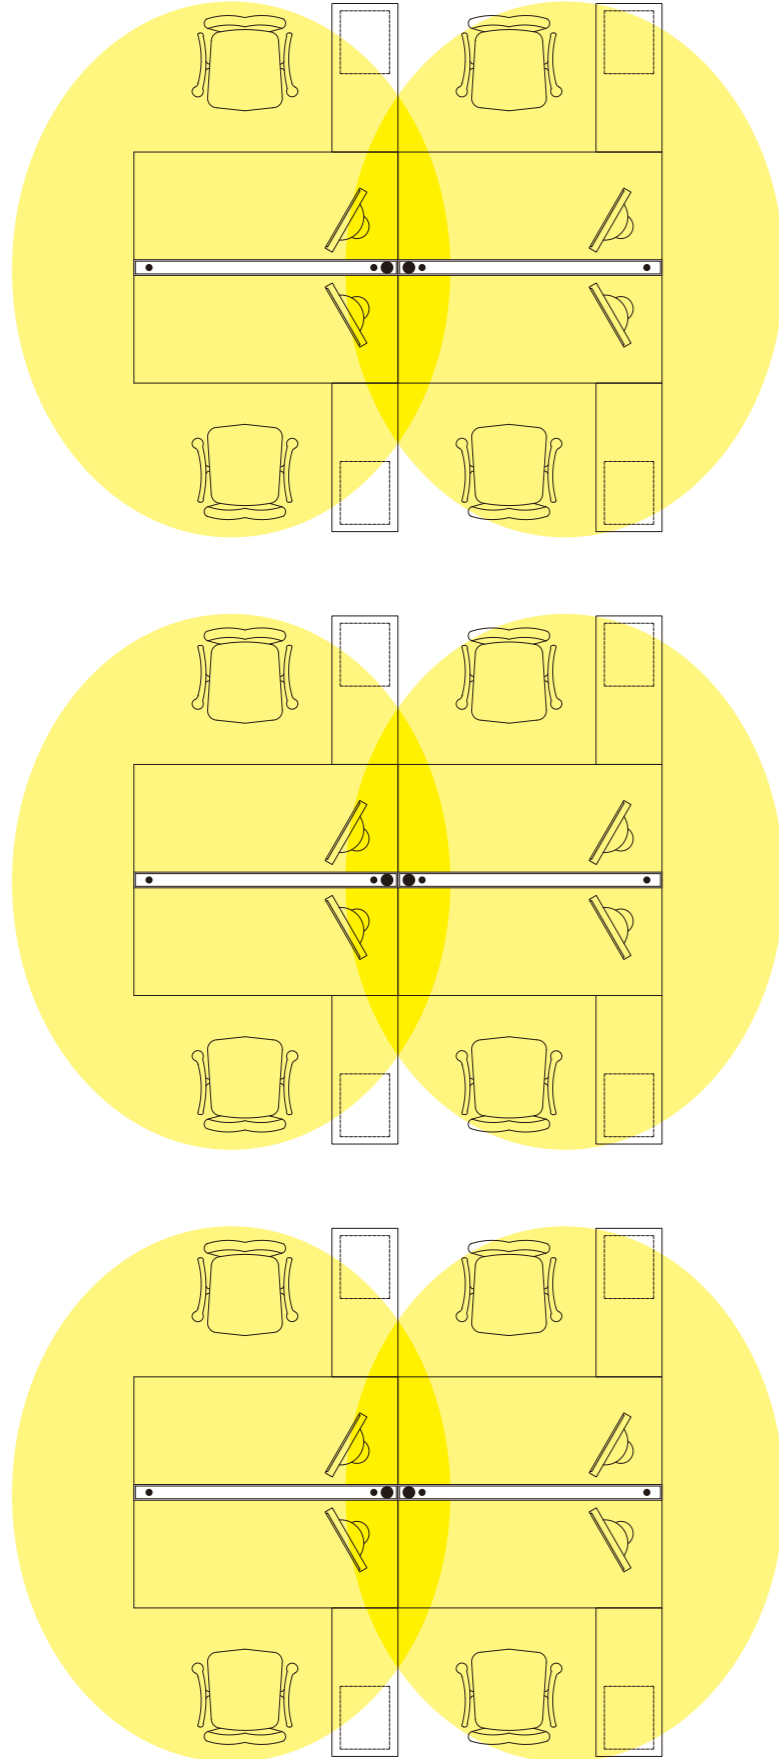


OFFICE





OFFICE

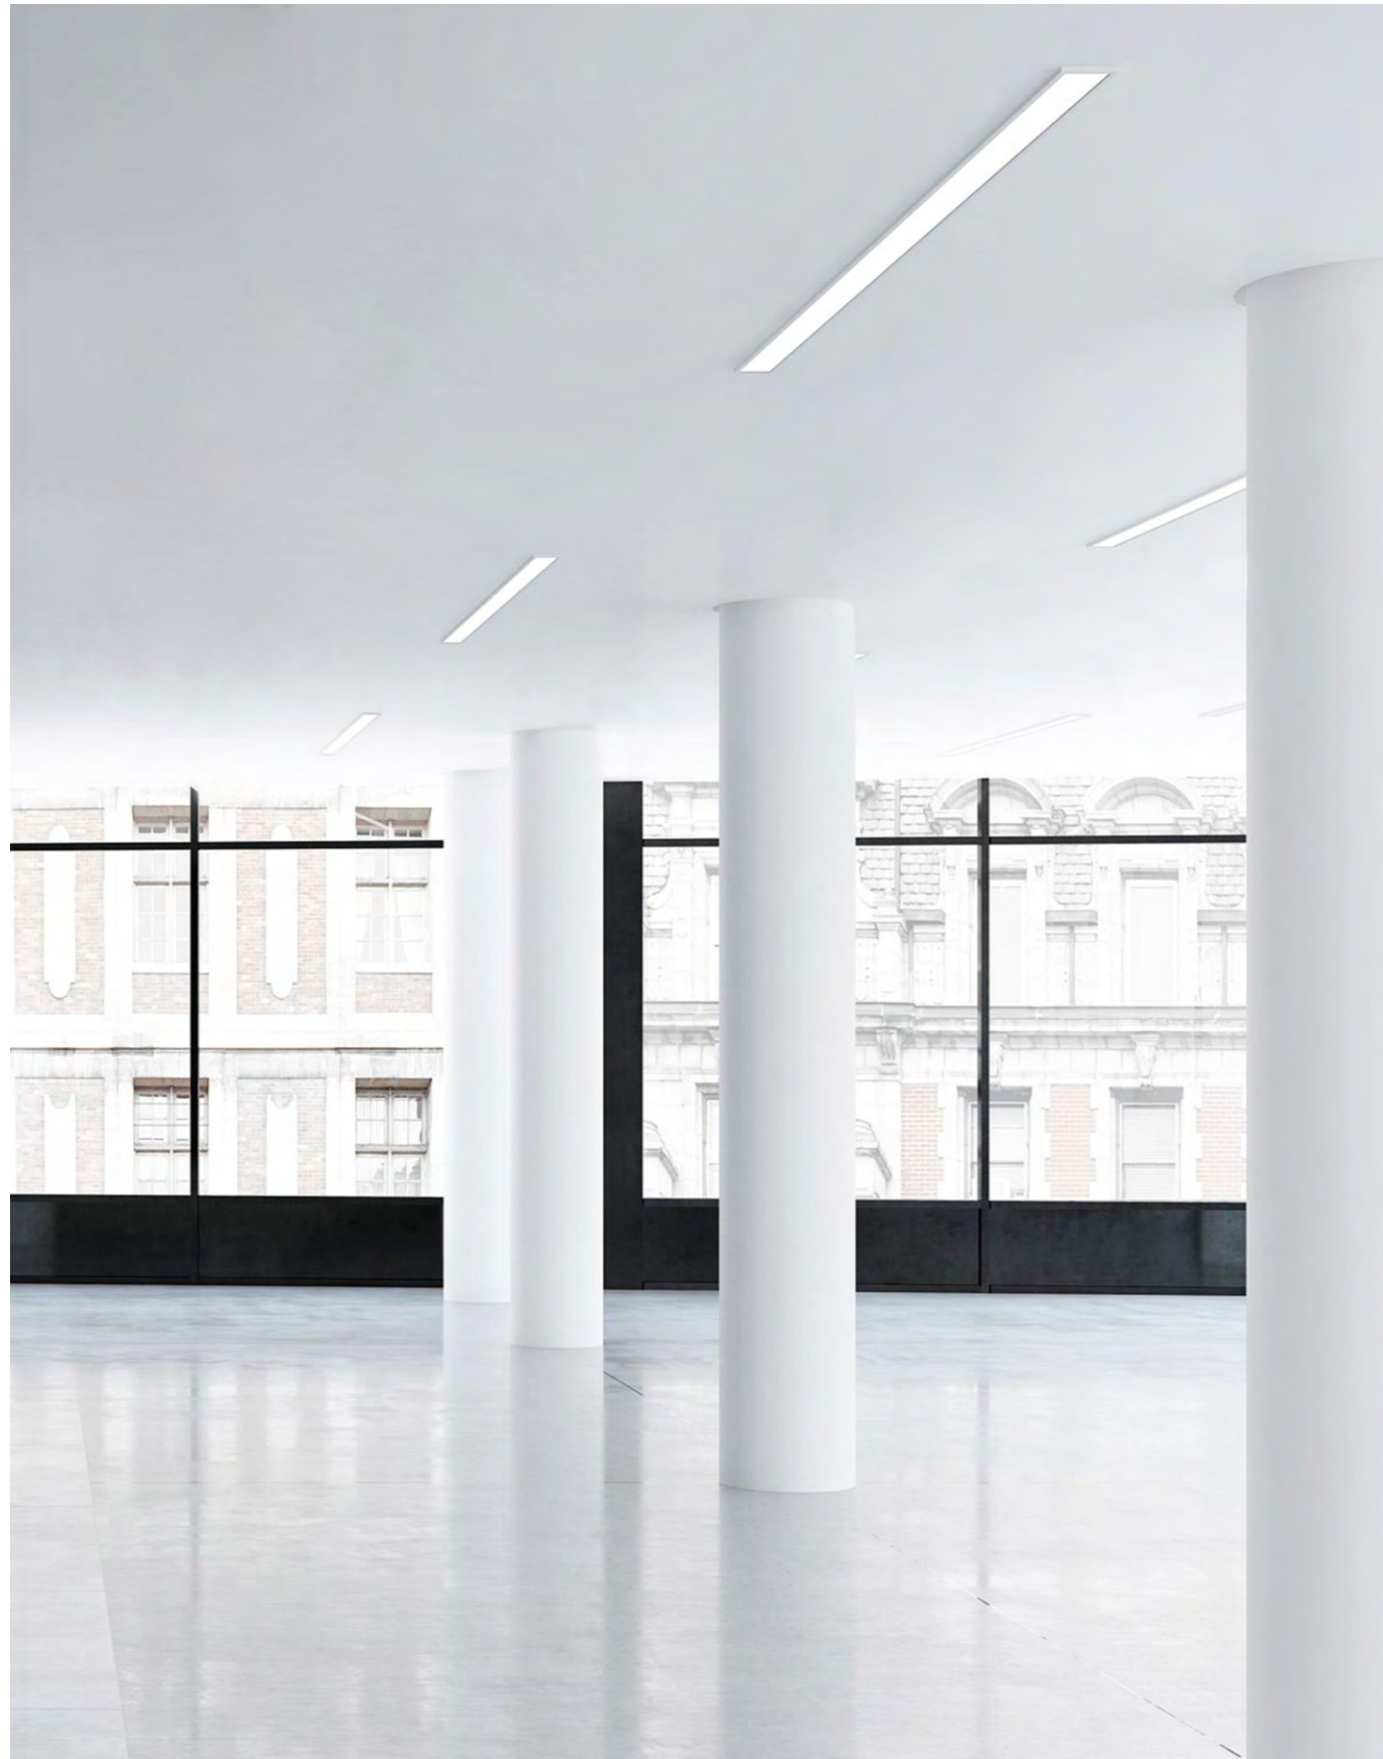

OFFICE

Recessed



1150x52x84mm 18W/36W

P515



1460x52x84mm 28W/46W

P515



1146x65x78mm 18W/36W

P516

Pendant



880x37x70mm 28W

P517



1440x37x70mm 28W/46W

P517



1136x37x70mm 18W/36W

P518



1130x60x75mm 18W/36W

P518

OFFICE Recessed



SMD LED **CRI≥80** **IP20** **CE** **RoHS**

Housing color: White Silver Black Anodising Brush
 Color temperature: 3000K 4000K 6000K

Driver gear for LED: Non-Dimmable
 1-10V Dimmable
 DALI Dimmable



- The lamp body is made of pure aluminum and is molded through extrusion and then shaped by CNC machines: the surface is oxidized after brushing or electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- Tuneable white dimming control is available.
- Seamless continuous lighting system without dark spots available.
- Exquisite design for the dimension of the lighting fixture.
- Applications: offices , educational institutes ,hospitals, warehouses , meeting rooms, schools and showrooms.

R3010 18W 1540lm
 AC 230V or With LED Driver 36V-500mA
 230V-50Hz



NW

 1.95kg


R3010 36W 2500lm
 AC 230V or With LED Driver 36V-900mA
 230V-50Hz

NW

 1.95kg




SMD LED



GW 15.0KG

SMD LED **CRI≥80** **IP20** **CE** **RoHS**

Housing color: White Silver Black Anodising Brush
 Color temperature: 3000K 4000K 6000K



- The lamp body is made of pure aluminum and is molded through extrusion and then shaped by CNC machines: the surface is oxidized after brushing or electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- Tuneable white dimming control is available.
- Seamless continuous lighting system without dark spots available.
- Exquisite design for the dimension of the lighting fixture.
- Applications: offices , educational institutes ,hospitals, warehouses , meeting rooms, schools and showrooms.

R3011 28W 2200lm
 AC 230V or With LED Driver
 36V-500mA+2x15V-350mA
 230V-50Hz



NW

 2.30kg


R3011 46W 3150lm
 AC 230V or With LED Driver
 36V-900mA+2x15V-350mA
 230V-50Hz

NW

 2.30kg



SMD LED



GW 17.2KG

OFFICE Recessed



SMD LED **CRI≥80** **IP20** **CE** **RoHS**

Housing color: White Silver Black Anodising Brush
 Color temperature: 3000K 4000K 6000K

Driver gear for LED: Non-Dimmable
 1-10V Dimmable
 DALI Dimmable



- The lamp body is made of pure aluminum and is molded through extrusion and then shaped by CNC machines: the surface is oxidized after brushing or electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- Tuneable white dimming control is available.
- Seamless continuous lighting system without dark spots available.
- Applications: offices , educational institutes ,hospitals, warehouses , meeting rooms, schools and showrooms.

R3009 18W 1540lm
 AC 230V or With LED Driver 36V-500mA
 230V-50Hz



NW

 2.10kg


R3009 36W 2500lm
 AC 230V or With LED Driver 36V-900mA
 230V-50Hz

NW

 2.10kg

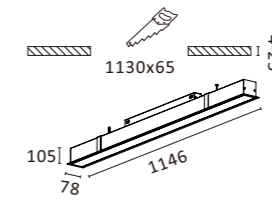

SMD LED




GW 11.2KG

OFFICE Pendant



SMD LED CRI≥80 IP20 CE RoHS

Housing color: White Silver Black Anodising Brush
 Color temperature: 3000K 4000K 6000K






- The lamp body is made of pure aluminum and is molded through extrusion and then shaped by CNC machines: the surface is oxidized after brushing or electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- Tuneable white dimming control is available.
- Seamless continuous lighting system without dark spots available.
- Exquisite design for the dimension of the lighting fixture.
- Applications: offices , educational institutes ,hospitals, warehouses , meeting rooms, schools and showrooms.

F3175 28W 2100lm
 AC 230V or With LED Driver 36V-500mA+2x15V-350mA
 230V-50Hz


NW

 1.88kg



SMD LED CRI≥80 IP20 CE RoHS

Housing color: White Silver Black Anodising Brush
 Color temperature: 3000K 4000K 6000K





- The lamp body is made of pure aluminum and is molded through extrusion and then shaped by CNC machines: the surface is oxidized after brushing or electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- Tuneable white dimming control is available.
- Seamless continuous lighting system without dark spots available.
- Exquisite design for the dimension of the lighting fixture.
- Applications: offices , educational institutes ,hospitals, warehouses , meeting rooms, schools and showrooms.

F3176 28W 2200lm
 AC 230V or With LED Driver
 36V-500mA+2x15V-350mA
 230V-50Hz

NW

 2.50kg




OFFICE Pendant



SMD LED CRI≥80 IP20 CE RoHS

Housing color: White Silver Black Anodising Brush
 Color temperature: 3000K 4000K 6000K






- The lamp body is made of pure aluminum and is molded through extrusion and then shaped by CNC machines: the surface is oxidized after brushing or electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- Tuneable white dimming control is available.
- Seamless continuous lighting system without dark spots available.
- Exquisite design for the dimension of the lighting fixture.
- Applications: offices , educational institutes ,hospitals, warehouses , meeting rooms, schools and showrooms.

F3177 18W 1100lm
 AC 230V or With LED Driver 36V-500mA
 230V-50Hz

NW

 1.95kg



F3177 36W 2100lm
 AC 230V or With LED Driver 36V-900mA
 230V-50Hz

NW




 1.95kg

- The lamp body is made of pure aluminum and is molded through extrusion and then shaped by CNC machines: the surface is oxidized after brushing or electrostatic thermo-painting finish.
- Germany imported high transmittance PMMA diffuser specially designed for LED light sources creating a high visual comfort and very uniform lighting distributions.
- Tuneable white dimming control is available.
- Seamless continuous lighting system without dark spots available.
- Applications: offices , educational institutes ,hospitals, warehouses , meeting rooms, schools and showrooms.

F7007 18W 1100lm
 AC 230V or With LED Driver 36V-500mA
 230V-50Hz

NW

 2.30kg




F7007 36W 2100lm
 AC 230V or With LED Driver 36V-900mA
 230V-50Hz

NW


 2.30kg

Accessories: connecting plate



Small connecting bracket


Suitable for:
F3175 / F3176 / F3177



Large connecting bracket

Suitable for:
F7007

Connecting plate installation spec

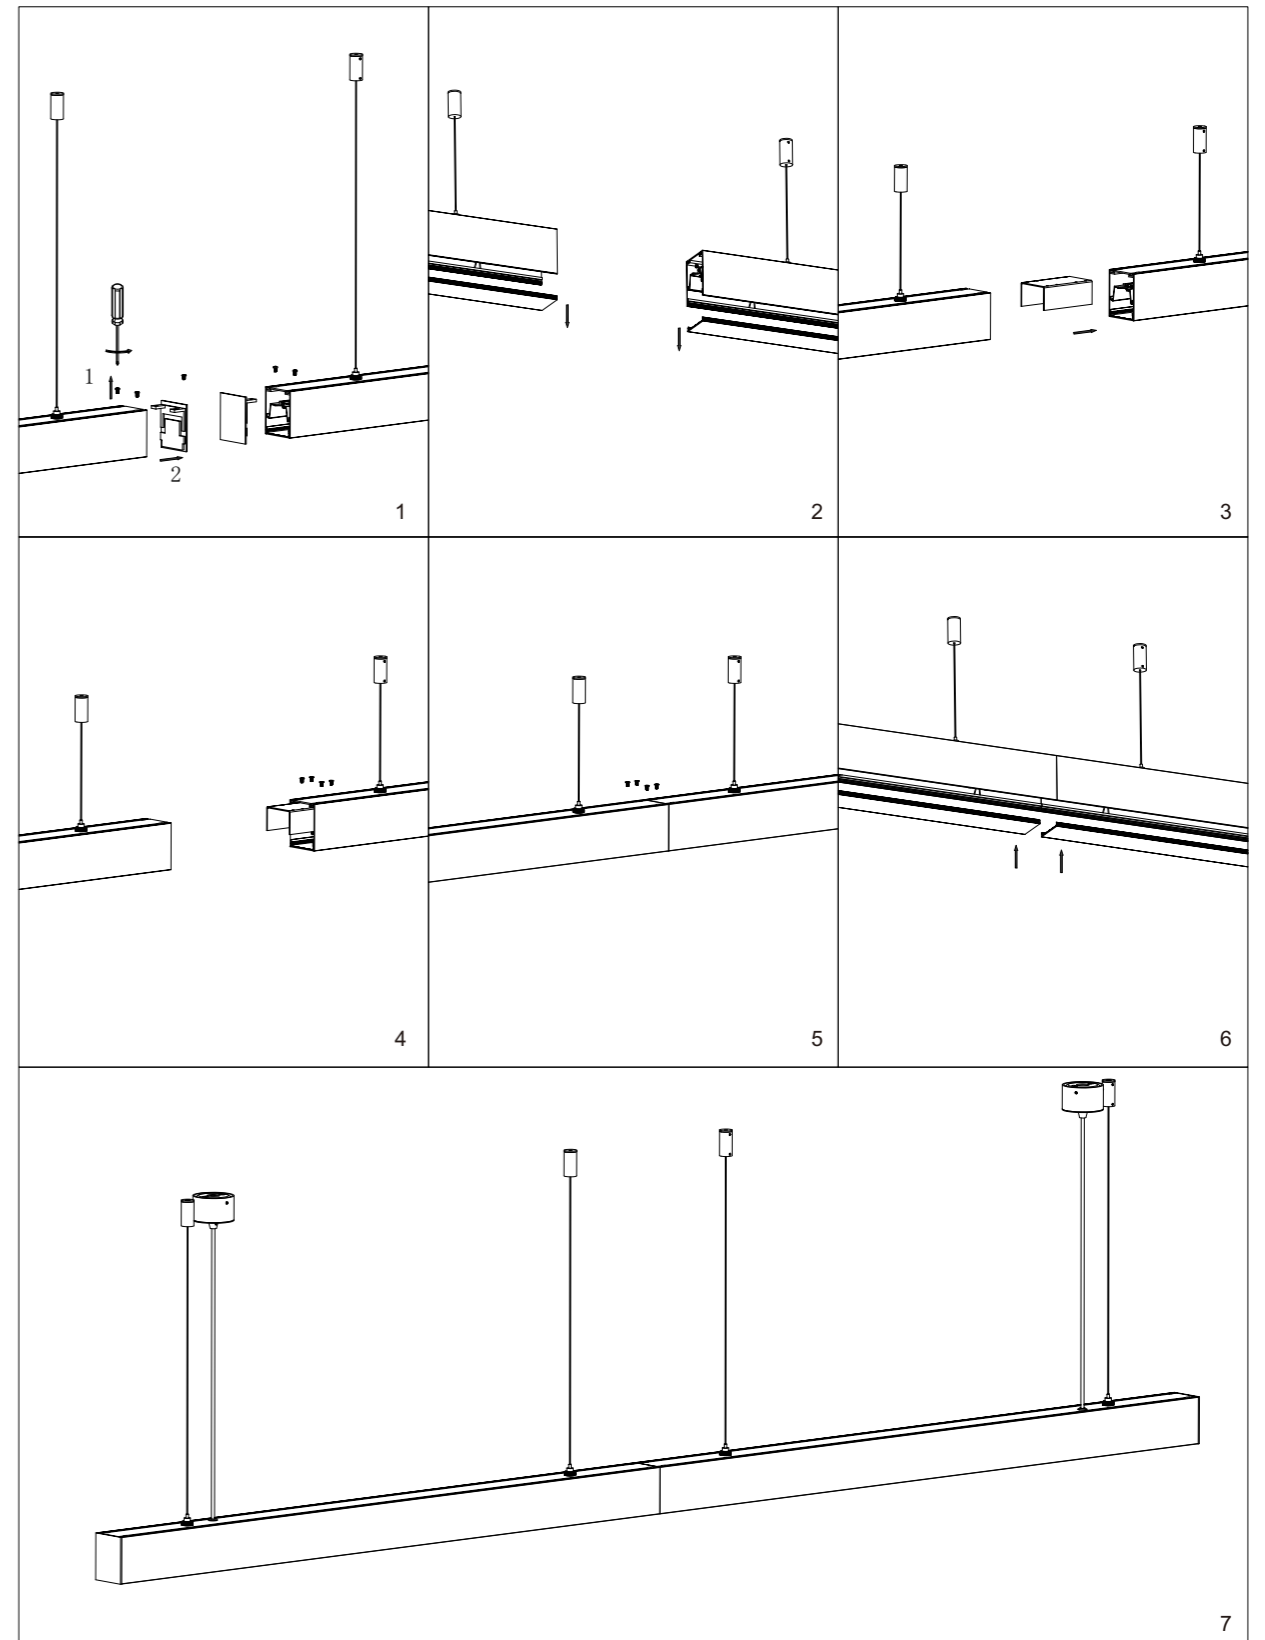










DRIVER



LIGHT SOURCE



ICONS

symbol	Description
	A luminaire in which protection against electric shock does not rely on basic insulation only, but which includes an additional safety precaution in such a way that means are provided for the connection of accessible conductive parts to the protective (earthing) conductor in the fixed wiring of the installation in such a way that accessible conductive parts cannot become live in the event of a failure of the basic insulation.
	A luminaire in which protection against electric shock does not rely on basic insulation only, but in which additional safety precautions such as double insulation or reinforced insulation are provided, there being no provision for protective earthing or reliance upon installation conditions.
	A luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated.
	All products subject to the EMC guideline 89/336 (electromagnetic compatibility) and the guideline 73/23 (low-voltage) meet the requirements therein and bear the CE symbol on their packaging.
	All luminaires meet the F requirements in accordance with EN 60598-1 and are suitable for mounting on normal inflammable mounting surfaces (housing parts).
IP20	All luminaires meet the requirements of protection mode IP20 and are not marked. Other protection modes are specified for each product.
	Protection mode IP44 Splash proof protection against splashes from all directions.
	Protection mode IP65 Protection against dust and strong jets of water from all directions.
	Protection mode IP67 Protection against dust and against the results of temporary immersion.
	Protection mode IP68xm Protection against dust and against the results of continuous submersion up to a depth of *m.

PRODUCT CODES

Model	Page	Model	Page	Model	Page	Model	Page	Model	Page	Model	Page
4001	453	C6038	378	P6026	398	R6178	334	R6259	206	R6364	307
4002	453	C6044	368	P6033	418	R6179	336	R6262	095	R6365	309
4003	453	C6045	367	P6034	419	R6180	338	R6270	146	R6803	499
4005	455	C6046	379	P6035	420	R6188	052	R6280	240	R6821	186
4006	455	C6047	311	P6040	421	R6190	204	R6282	170	R6830	222
4007	455	C6048	313	P6041	422	R6191	334	R6285	144	R6831	223
4008	455	C6049	380	R3009	516	R6192	336	R6286	069	R6842	229
4009	455	C6050	457	R3010	515	R6193	338	R6287	071	R6843	230
4010	455	C6051	375	R3011	515	R6195	134	R6288	340	R6864	188
4011	455	C6052	376	R6008	499	R6196	133	R6289	342	R6865	187
4012	455	C6054	467	R6011	226	R6197	157	R6290	344	R6866	214
4013	456	C6062	370	R6013	225	R6198	114	R6291	251	R6867	213
4014	456	C6063	469	R6015	228	R6199	115	R6292	254	R6894	022
4015	456	C6221	369	R6017	227	R6200	172	R6295	303	R6897	016
4016	456	C6234	366	R6018	232	R6201	136	R6296	034	R6900	083
4017	456	C6257	459	R6020	109	R6202	135	R6297	040	R6901	085
4018	454	C6264	371	R6083	247	R6203	339	R6298	053	R6902	091
4019	454	C6290	372	R6084	249	R6204	341	R6299	031	R6903	093
4020	454	C6300	461	R6087	267	R6205	343	R6300	037	R6904	087
4021	453	E6007	505	R6089	269	R6206	333	R6301	471	R6905	089
4022	453	E6013	506	R6092	158	R6207	335	R6302	475	R6918	349
4023	453	E6016	503	R6093	126	R6208	337	R6307	473	R6924	245
4024	456	E6018	501	R6094	131	R6209	327	R6308	478	R6925	265
4025	456	E6021	180	R6103	231	R6210	329	R6309	017	T6001	441
4026	456	E6022	181	R6104	111	R6211	331	R6310	019	T6002	445
4027	456	E6023	182	R6108	112	R6212	321	R6311	020	T6012	435
4028	456	E6024	183	R6116	211	R6213	323	R6314	205	T6017	437
5058	500	E6025	184	R6117	212	R6214	325	R6315	018	T6032	443
		E6026	185	R6118	216	R6215	110	R6316	128	T6033	448
C6002	386	E6027	021	R6121	207	R6216	063	R6319	196	T6099	439
C6003	386	E6028	015	R6136	051	R6217	064	R6321	132	W6001	496
C6004	385	E6029	502	R6140	169	R6218	156	R6324	215	W6014	496
C6005	385	E6031	505	R6141	209	R6229	065	R6325	160	W6016	497
C6019	233	E6170	504	R6146	171	R6230	067	R6326	137	W6019	497
C6021	363	F3175	517	R6153	105	R6231	271	R6327	138	W6036	495
C6023	234	F3176	517	R6154	106	R6232	274	R6334	195	W6102	495
C6024	365	F3177	518	R6155	328	R6233	277	R6335	194	W6171	498
C6025	364	F7007	518	R6156	330	R6235	280	R6338	055	W6186	489
C6026	463	P6002	388	R6157	332	R6236	283	R6340	011	W6187	489
C6027	351	P6003	388	R6158	322	R6237	286	R6341	012	W7500	490
C6028	353	P6004	387	R6159	324	R6238	328	R6342	013	W7501	491
C6029	410	P6005	387	R6160	326	R6239	330	R6343	014	W7502	493
C6030	409	P6016	404	R6161	210	R6240	332	R6356	322	W7503	492
C6031	408	P6017	405	R6171	113	R6245	239	R6357	324	W7504	494
C6032	407	P6018	406	R6172	154	R6248	116	R6358	326	W7600	490
C6033	377	P6022	394	R6173	155	R6249	203	R6360	297	W7601	491
C6034	465	P6023	395	R6175	340	R6254	108	R6361	299	W7602	493
C6035	373	P6024	396	R6176	342	R6255	107	R6362	301	W7603	492
C6036	374	P6025	397	R6177	344	R6256	202	R6363	305	W7604	494